

TSM-DC05

The Performance Panel



Easy installation and handling for various applications



Module can bears snow loads (5400PA) and wind loads (2400PA)



Guaranteed power output (0~+3%)



High performance under low light conditions (Cloudy days, mornings and evenings)



Independently certified by international certification body*



Manufactured according to International Quality and Environment Management System (ISO9001, ISO14001)



A high-efficiency module, with maximum power outputs ranging from 225 to 245Wp. Made with six-inch Monocrystalline cells, with module efficiencies up to 15.0%, this module is ideal for residential and rooftops installations.

Trina Solar, **the best \$/kWh** value under the sun



Trina Solar Limited


No. 2 Trina Road, Trina PV Industrial Park, New District, Changzhou, Jiangsu, 213031, China

T +86 519 8548 2008
F +86 519 8517 6021
E sales@trinasolar.com


Founded in 1997, Trina Solar is a vertically integrated PV manufacturer, producing everything from ingots to modules, using both mono and multicrystalline technologies. At the end of 2010, the company will have a nameplate module capacity of 950MW. Trina Solar's wide range of products are used in residential, commercial, industrial and public utility applications throughout the world.

Only by matching an efficient cost-structure with proven performance will we, as an industry, achieve grid parity. And at Trina Solar, we have both.

Dimensions of PV module TSM-DC05

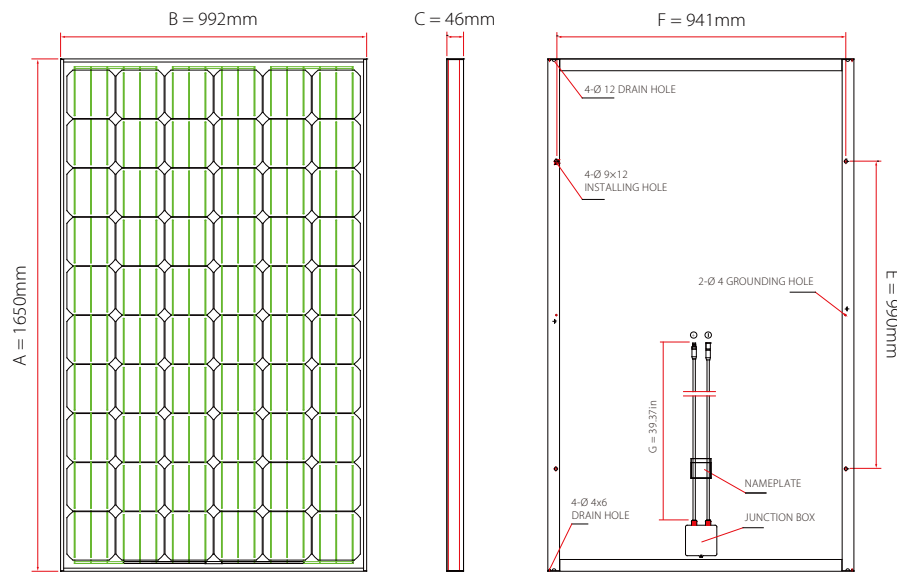

I-V Curves of PV module TSM-230DC05

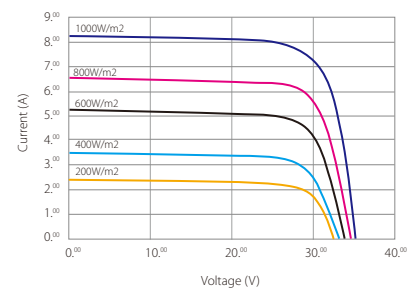

Efficiency	up to 15.0
Wattage	up to 245
Years warranty	25

Certification



Electrical Data @ STC	TSM-225DC05	TSM-230DC05	TSM-235DC05	TSM-240DC05	TSM-245DC05
Peak Power Watts- P_{MAX} (WP)	225	230	235	240	245
Power Output Tolerance- P_{MAX} (%)	0/+3	0/+3	0/+3	0/+3	0/+3
Maximum Power Voltage- V_{MAX} (V)	29.4	29.8	30.1	30.4	30.7
Maximum Power Current- I_{MPP} (A)	7.66	7.72	7.81	7.89	7.98
Open Circuit Voltage- V_{OC} (V)	36.9	37.0	37.1	37.2	37.3
Short Circuit Current- I_{SC} (A)	8.20	8.26	8.31	8.37	8.47
Encapsulated Cell Efficiency η_c (%)	15.9	16.2	16.6	16.9	17.3
Module Efficiency η_m (%)	13.7	14.1	14.4	14.7	15.0

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

General Data

Cell Type	156 x 156mm Monocrystalline silicon, 60pcs (6x10)
Glass	High Transmission, Low Iron, Tempered Glass 3.2mm
Frame	Anodized Aluminum
J-Box / Connector	1. Tyco / Tyco or MC4, IP65 2. Renhe / 05-6 or MC4, IP65

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	46°C (±2°C)
Temperature Coefficient of P_{MPP}	-0.45%/°C
Temperature Coefficient of V_{OC}	-0.35%/°C
Temperature Coefficient of I_{SC}	0.05%/°C

Mechanical and Packing Configuration


Dimensions (A x B x C)	1650 x 992 x 46mm
Installation Hole Dimensions (E x F)	990 x 941mm
Cable length (G)	1000mm
Weight	19.5kg
Packing Configuration	20pcs/carton
Quantity/Pallet	1 carton/pallet
Loading Capacity	520pcs/40ft, 120pcs/20ft

Maximum Ratings

Operating Temperature	-40 ~ +85°C
Storage Temperature	-40 ~ +85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse	15A

Warranty

5 years manufacturing warranty
10 years warranty, 90% power output
25 years warranty, 80% power output



CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© August 2010 Trina Solar Limited. All rights reserved. Specifications included in this datasheet are subject to change without notice.